

JinkoSolar to Supply 1.1MWh/500kW PV-plus-Energy Storage for Kenya Refugee Camp

JinkoSolar will supply a 1.1 MWh energy storage system (ESS) integrated with a 500kW PV project to a refugee camp in Kenya that will secure a more stable supply of power.

JinkoSolar' s air cooling energy storage system is featured of 10% higher power density compared to its peers, a pre-assembled design, and an IP65 protection rating. The company also provides liquid cooling ESS called SunGiga with 20% higher power density compared to air cooling, 20% higher lifecycles (up to 15 years), 30% less power consumption, and high-efficiency thermal management. SunGiga is a brand-new solution for applications spanning generation, grid ancillary services, regulation, and peak shaving. The device comes in a 250kWh to 2.5 MWh capacity and supports voltages ranging from 1,000 V to 1,500 V. The company's patented thermal solution can run at high

power efficiency throughout a 24-hour cycle. The system' s energy management software will give camp administrators the ability to prioritize and schedule the delivery of power based on residents' most critical needs.

While refugee camps are traditionally powered by diesel generators, diesel is more expensive than renewable energy and is dangerous to transport in a volatile region. Once the system delivers sufficient energy to the camp's households, it can then begin to tackle the clinic and school, for example, which currently rely on diesel generation.

JinkoSolar has developed and delivered a number of off-grid microgrid projects pairing solar, energy storage, and other resources in Asia, Africa.



Figure 1: Project Photos


JKS540~1620K-500H



Key Features

- Highly integrated system with various working modes
- Pre-installed product enables express shipping and faster

System Topology

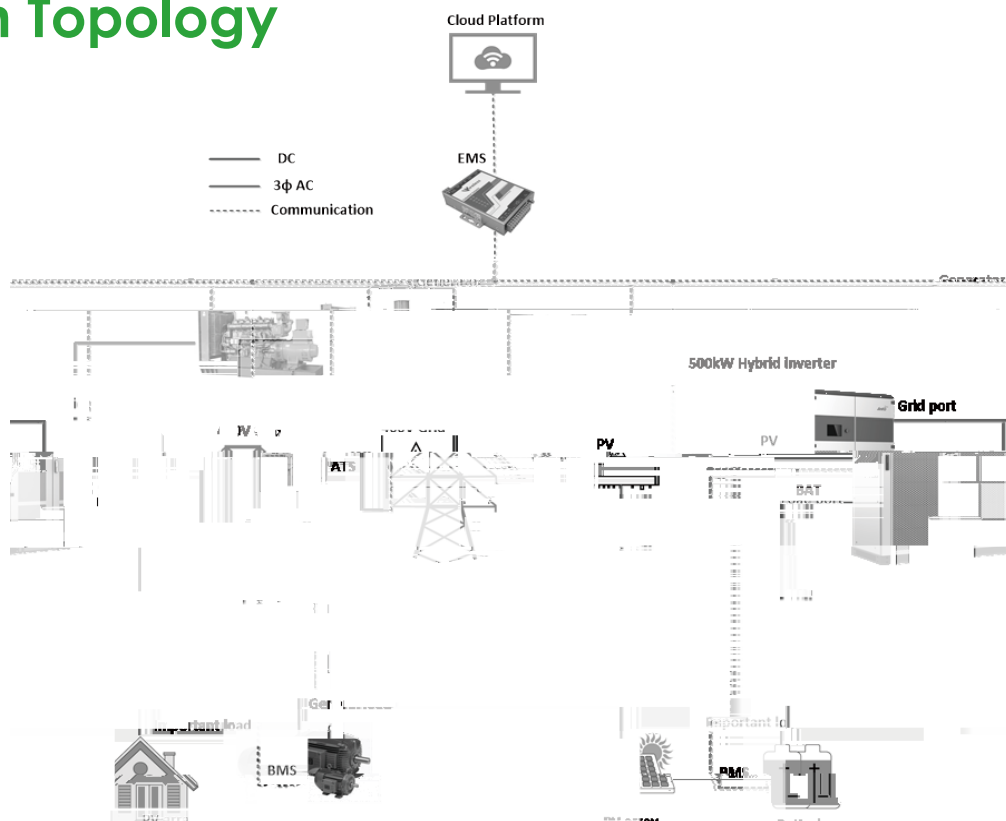

SYSTEM TECHNICAL SPECIFICATIONS

DC Data	JKS540K-500H				JKS1080K-500H				JKS1620K-500H			
Battery Chemistry	Lithium Iron Phosphate (LFP)											
Cell Life Cycle	5,000	1	25	0%	5,000	0.5	25	0%				
Cell Specification	3.2V/96Ah											
Battery System Configuration	4P11S				8P11S				12P11S			
DC Rated Energy Capacity	540kWh				1080kWh				1620kWh			
Rated Voltage	704V											
Voltage Range	616V~792V											
BMS Communication Interface	RS485, Ethernet, GPRS											
BMS Communication Protocol												
Max.PV Input Voltage	1000V											
Standard/Max PV Power	600/720kW											
MPPT voltage range	250-850V											
MPPT voltage range@full load	450-850V											
AC Data												
Rated AC Power	500kW											
Maximum AC Power	550kW											
Rated Voltage	400V											
AC Rate of Current	722A											
THDi	3%											
Power Factor	1(leading) ~1(lagging)											
Rated Frequency (Hz)	50/60Hz											
AC Connection	3W+N+PE											
STS Power	500kW											
STS Switching Time	20											
General Data												
Dimension (W*D*H)	6,058*2,438*2,591mm						12,192*2,438*2,591mm					
Weight	<20T						<30T				40	
Degree of Protection	IP54											
Operating Temperature Range	-20~40°C											
Relative Humidity	0 5% (-)											
Max. Working Altitude	3,000m											
Cooling Concept of DC hatch	HVAC											
Communication Interfaces	RS485, Ethernet, GPRS											
Certifications	UL9540A, IEC62619, CE, UN38.3											

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© Jinko Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.