



? WJZS` [US^>aSV
7` ZS` UW

BdVgUF1 Sds` fk

>[` VsdBai /d
l Sds` fk

3` ^gS^6WdSVSfja`
AhdWk 3

AhdSVS



QUALITY™
Continuous Quality Assurance

66HL4M-(V) 610-635 Watt

Mechanical Characteristics

5W*FkbW	@ žrkbW? a` a žJkfeS^f W
@ažaXUW'e	#%\$((° \$fi
6[W e[a` e	\$%\$° ##%&° % _ _
I WYZf	\$*ž\$]Y
8d` f 9'See	%ž\$ _ ! 3` f[ždW VUf[a` 5aSf[Yl : [YZ FdS` e_ [ee[a` t >ai :d` t FV_ bWVW 9'See
8dS_ W	3` aV[l VW 3'g_ [[g_ 3^ak
<g` Uf[a` 4aj	;B(* DsfVW
BdchVUf[a` 5'See	5'See;;
:75 8[dMfkbW	5'See 5
5a` ` VUfadFkbW	<=" %? !? 5&! AfZVde
Agfbgf 5ST Wđ	&Z' _ _ ^ /Efj &" _ _ t/žj \$" _ _ ad5gefa_ [l VW >V YfZ

Packaging Configuration

BS^W 6[W e[a` e	\$%+(° ##^° #S' # _ _
BSU[Y VVWS[^ /Fi a bS^Wf/A` WefSU] fi	%# bUe! bS^Wf (\$ bUe! efSU] t (\$" bUe! &" r: C 5a` fS[Wđ

Specifications (STC)




? S[_ g_ Bai Wđ B_ Sj M bO	(#" (#' (\$' (\$' (%' (%'
? S[_ g_ Bai WđHa`fSYW H_ b MIO	&" ž (&" ž) % &" ž+ &" ž') &#ž\$% &#ž'et
? S[_ g_ Bai Wđ5gdtW f ;_ b MIO	#' ž' & #' ž## #' ž#(#' ž\$ \$ #' ž\$* #' ž'&
A bW žU[djg[f Ha`fSYW HaU MIO	&* ž' % &* ž) + &* ž+' &+ž## &+ž\$) &+ž&%
E Z ad žU[djg[f 5gdtW f :eU MIO	#(ž' # #(ž' * #(ž# #' (ž\$ \$ #(ž\$+ #(ž')
? aVg W7 U[W Uk EF5 M O	\$ž\$ * \$žž) \$žž+' \$žž#& \$žž/\$ \$žž/ #
Bai WđFa`WđS` UW	" p t %
FV_ bVđSfgdV5aW U[W feaXB_ Sj	ž ž\$, !, 5
FV_ bVđSfgdV5aW U[W feaXHaU	ž ž\$, !, 5
FV_ bVđSfgdV5aW U[W feaX:eU	" ž & , !, 5

EF5 :dtSV[S` UM#"" ! l_ ž 5W*FV_ bVđSfgdV5` ,5l 3? /#Z

Application Conditions

A bVđSf[Y FV_ bVđSfgdW	ž&" , 5 p t) " , 5
? S[_ g_ EkefW_ Ha`fSYW	#"" !#"" H65 / 75fi
? S[_ g_ EVđVđ 8geWDSf[Y	% 3


Engineering Drawings

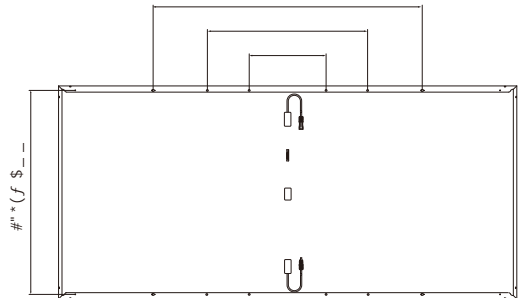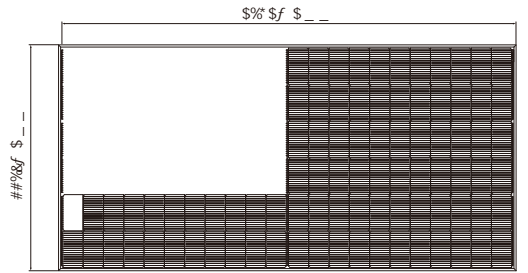

f@aFw8adebWU[UV_ W e[a` eS` V fa`VđS` UMđS` YWđ b`VđeW
d/Wđfa fZVUđdt/Mba` V[Y VVWS[VW_ aVg`WVđSi [Yez

Electrical Performance

Power-Voltage Curves (66HL4M- V 615W)

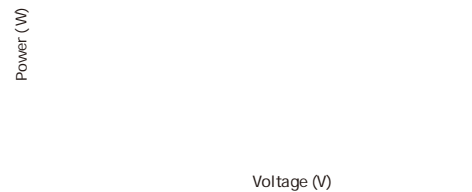

Current-Voltage Curves (66HL4M-(V) 615W)

